

EL126

Expandable, Compact High Brightness Bar Light



- 4i) High intensity light in a small package - only 20.1 mm (.79") wide
- 4i) Expandable in 50mm (2") increments up to 1029.2mm (40")

Ordering Information

Standard Product Variation:
Shipped Within Two Weeks


EL126	XX	-	XXX	XX	X	X	XXX
	2" increments up to 40"		(blue) 470 (red) 625 (white) WHI	IC IS• C2• C3 C5 24	W	D (Diffuser) P° (Polarizer)	M12* (male)

Spectral wavelength
 Wash Down Option
 Optional power compatibility
 Light Conditioning
 Alternative Connector

IC = ICS (requires 24v power supply)
 IS = ISU (requires 24v power supply)
 C2 = Ai Connector
 C5 = Pulsar 320 Connector
 • Not available with all lengths
 ° Not available in combination with the Wash Down Option
 * Available with IC, IS, and 24v options only

Built-to-order lights are non-returnable.

Dimensional Information

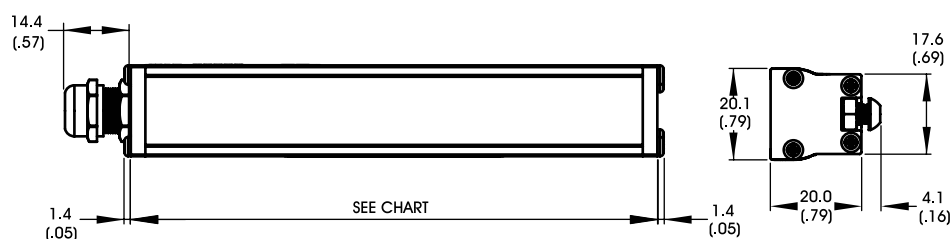

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

EL126 Unsealed

PART NUMBER	LENGTH IN MM
EL12602	64.0 (2.52)
AL126*	114.8 (4.52)
EL12606	165.6 (6.52)
EL12608	216.4 (8.52)
EL12610	267.2 (10.52)
EL12612	318.0 (12.52)
EL12614	368.8 (14.52)
EL12616	419.6 (16.52)
UP TO EL12640	1029.2 (40.52)

*see AL126 Spec Sheet

EL126 with Washdown

PART NUMBER	LENGTH IN MM
EL12602	66.6 (2.62)
AL126*	117.4 (4.62)
EL12606	168.2 (6.62)
EL12608	219.0 (8.62)
EL12610	269.8 (10.62)
EL12612	320.6 (12.62)
EL12614	371.35 (14.62)
EL12616	422.2 (16.62)
UP TO EL12640	1031.8 (40.62)

*see AL126 Spec Sheet

[Click for Installation Models & Drawings](#)

Current Requirements

Maximum draw per each 50mm (2") segment

	blue	red	white	
24v	100	100	100	mA

Standard Product Information

Product Lifetime:	50,000 hours
Operating Temperature:	0-60° C