

# EL174

## High Intensity Line Light



- Aii** Designed for Large Area or Line Scan applications
- Aii** Available in 152mm (6") increments up to 2134mm (84")
- Aii** Washdown Version Available in 152mm (6") increments up to 1220mm (48")

### Ordering Information

Standard Product Variation:  
Shipped Within Three Weeks

EL174	Lighted Length (# of LEDs) <b>XX</b>	Lens Option ^ <b>X</b>	-	Spectral wavelength <b>XXX</b>	Optional power compatibility <b>X</b>	Heat Sink <b>X</b>	Wash Down Option <b>X</b>	Optional Light Conditioning <b>X</b>	Alternative Connector <b>XXX</b>
	6 LEDs = 152.4 mm (6")	N W		(uv) 395 ◊ (blue) 470 (green) 530 (amber) 590 (red) 625 (infra-red) 850 ◊ (white) WHI	IC IS 24 C2 C3 C5	H (See spec below)	W	D° (Diffuser) P° (Polarizer)	M12* (male)

IC = ICS (requires 24v power supply)  
IS = ISU (requires 24v power supply)  
C2 = Ai Connector  
C3 = Pulsar 710 Connector  
C5 = Pulsar 320 Connector  
\* Available with IC, IS, and 24v options only  
° - Not available with Wash Down Option  
◊ Available with Medium lens option only


#### Optimal working distance:

304.8mm (12")


^ Leave blank for Standard, Medium (M) Lens

Built-to-order lights are non-returnable.

### Dimensional Information

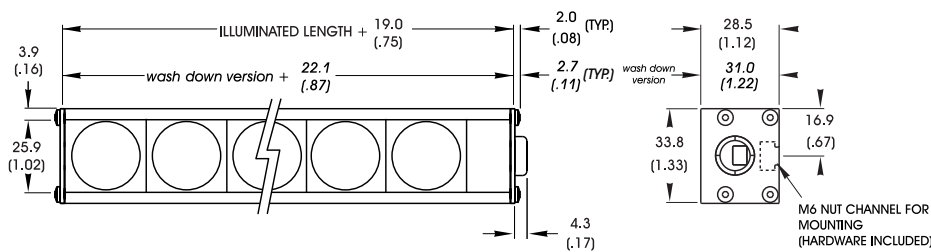

### Optional Heat Sink

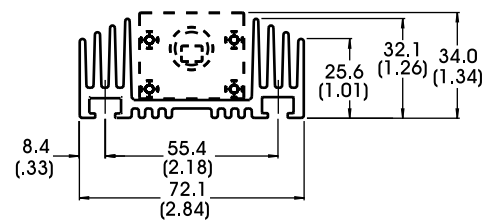

Cable Length: 1.5 Meter (59")

DIMENSIONS ARE IN MILLIMETERS (INCHES)

DIMENSIONS ARE IN MILLIMETERS (INCHES)

### Current Specifications

Maximum draw per 152mm (6") length

	uv	blue	green	amber	red	infra-red	white	
@24	350	350	350	350	350	350	350	mA

### Product Information

Finish:	Black Anodized and Acrylic
Operating Temperature:	0-60 C
Meets Specifications:	CE, RoHS
Product Lifetime:	50,000 hours